

OPTIONS**Flush Volume**

3.5 gpf (13.2 Lpf) (3.5)

2.4 gpf (9.1 Lpf) (2.4)

Control Stop

Less (L/STOP)

Vacuum Breaker

Less (XYV)

Outlet Tube

Trap Primer (TP)

Adapter

XL Sweat Solder Adapter Kit (XL)

Bumper

Angle Stop (YO)

Compliances & Certifications

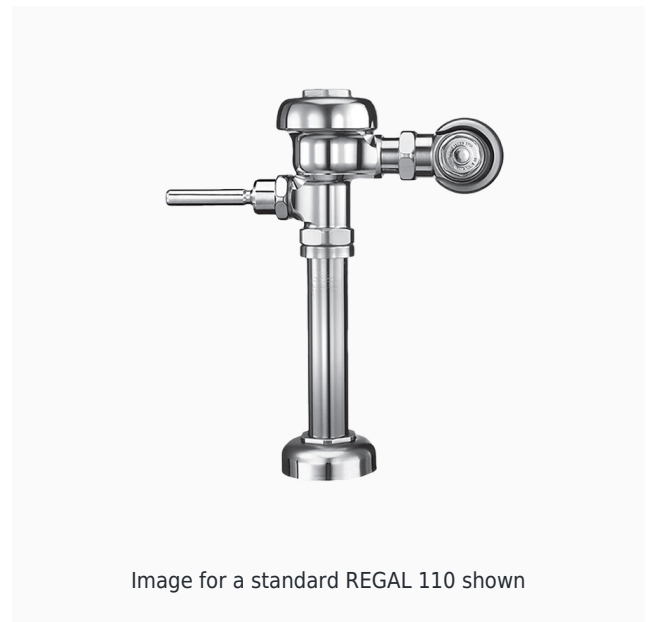
ADA Compliant

BAA Compliant

UPC Certified

NOTESFor product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

**DESCRIPTION**

Regal® Exposed Manual Water Closet Flushometer

FEATURES

- Flush volumes start as low as 1.6 gpf/6.0 Lpf to meet water-efficiency objectives
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents toilet from exceeding intended flush volume
- Low Consumption flush accuracy controlled by Para-Flo™ Technology
- Integrity of the product is maintained with control stop plug
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Regal XL Exposed Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Regal Flushometers Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com