


# TruTOUCH® Model Force Activated Touch Sensor

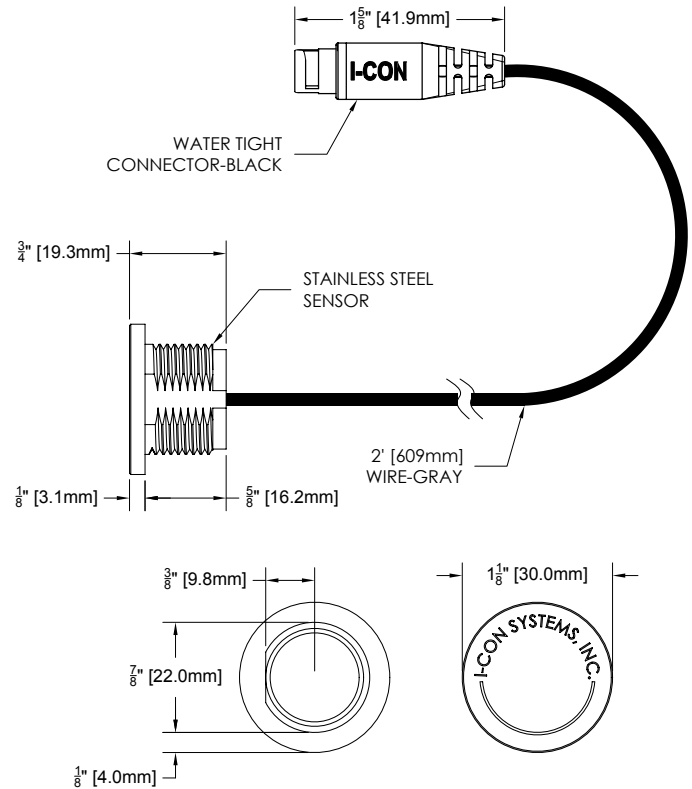

Part No. 100215

► **Description**

Fully Electronic Force Activated Sensor with no moving parts. Sensor includes a two foot lead with watertight connector. Lead cable with RJ connector is **required for operation and sold separately**. Choose from a variety of lengths below.

► **Lead Cable Length** (must choose one)

- 6' Lead Cable w/RJ Connector - WR-SEN-WT-4C-006
- 15' Lead Cable w/RJ Connector - WR-SEN-WT-4C-015
- 25' Lead Cable w/RJ Connector - WR-SEN-WT-4C-025
- 35' Lead Cable w/RJ Connector - WR-SEN-WT-4C-035
- 60' Lead Cable w/RJ Connector - WR-SEN-WT-4C-060

► **Accessories**

See Accessories Section of the I-CON catalog or contact our Customer Service Team for details.

**Specifications**

- Specifically designed for penal use
- Rugged, polished stainless steel housing with no internal moving parts makes the unit virtually vandal-proof
- Proven reliability with testing of over 1 million activations
- Unique design allows activation by finger pressure without compromising its sealing integrity
- Proprietary 5V DC design allowing for no power consumption until touched by operator.
- Ability to be remotely located up to three hundred (300) feet from the associated controller
- Telephone type connectors for quick and easy connection to controller
- Meets all ADA requirements
- IP 68 Protection
- Operating temperature range from -40F to 257F

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

This space is for Architect/Engineer approval



The information contained in this document is subject to change without notice.